



新久扬机械

# JYSN

SERIES DOUBLE  
SUCTION PUMP

Wuxi Xinjiuyang Machinery Manufacturing Co., Ltd.

(Xinjiuyang Pump)

无锡新久扬机械有限公司  
Wuxi Xinjiuyang Machinery Manufacturing Co., Ltd.  
无锡新久扬机械泵业有限公司  
Wuxi Xinjiuyang Pump Co., Ltd.



## Company Profile

Our company is a joint-stock enterprise specializing in the scientific research, production and sales of various kinds of ANSI, ISO2858 & ISO5199 chemical pumps, API610 chemical pumps, API685 magnetic pumps, vertical submerged pumps, double suction pumps, fluorine lined pumps, slurry pumps, direct coupling centrifugal pumps and other chemical pumps and variable frequency water supply equipment. So far our factory is in Wuxi City and we have a trading company in Shanghai City.

The total area of the company is about 15 thousand square meters, the workshop area is 13 thousand square meters, the turnover reached 10 million USD in the year 2020, with an annual output of about 10 thousand sets. Our company has received the title of Jiangsu High-tech Enterprise in 2020, and passed the ISO9001 quality system certification and CE certification.

Because of the continuous cooperation with Jiangsu University fluid center (Top-level fluid R&D center in China) and other universities, the quality of products has been steadily improving year by year, the product structure has been more reasonable, the market reputation has been rising, and the user community continues to expand. In 2020, we have mainly developed several major customers: global grain and oil giant -Cargill, multinational steel group- Delong Holdings, the top ten private enterprises in China- Xinfu Group.

The company has more than 30 series of pumps for users to choose. The company's products are adapted to different media, different temperatures, different specific gravity, different particle content, and different operating environments in terms of material diversity, structural variability, and multiple selection of seals. Products are widely used in petrochemical, metallurgy, automobile part coating, salad oil, food, light industry, chemical, pharmaceutical, electric power, mining, water treatment, high-rise construction and many other industries.




## Product description


JYSN type single-stage double-suction centrifugal pump is a new energy-saving horizontal split case pump newly developed on the basis of domestic and foreign old double-suction pumps. It is mainly used to transport clean water without physical particles or other liquids with similar physical and chemical properties to water, the temperature of the medium does not exceed 80°C, the pump series are suitable for factories, mines, urban water supply and drainage, power stations, farmland irrigation and drainage and various water conservancy projects. The pump series is compact in structure, beautiful in appearance, stable in operation and low in noise; the suction port and the discharge port of the pump are both below the shaft line of the pump. It is not necessary to disassemble the inlet and outlet pipelines and the motor during maintenance, as long as the pump cover is removed, the general parts of the pump can be removed for maintenance; the pump shaft seal is provided with high quality mechanical seal and soft packing seal, which can be chosen by users in different working conditions; the impeller, which has been checked for dynamic and static balance, is fixed on the pump shaft with a nut, its axial position can be adjusted by loosening and tightening nut; the pump is directly driven by the motor through the flexible coupling, and the internal combustion engine can also be used if necessary; from the direction of the motor, the pump rotates clockwise (can also be rotated counterclockwise according to user needs).




## Model description

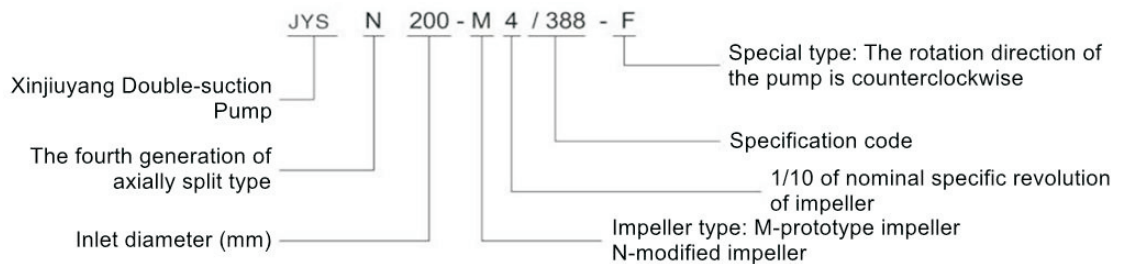

## Structural diagram

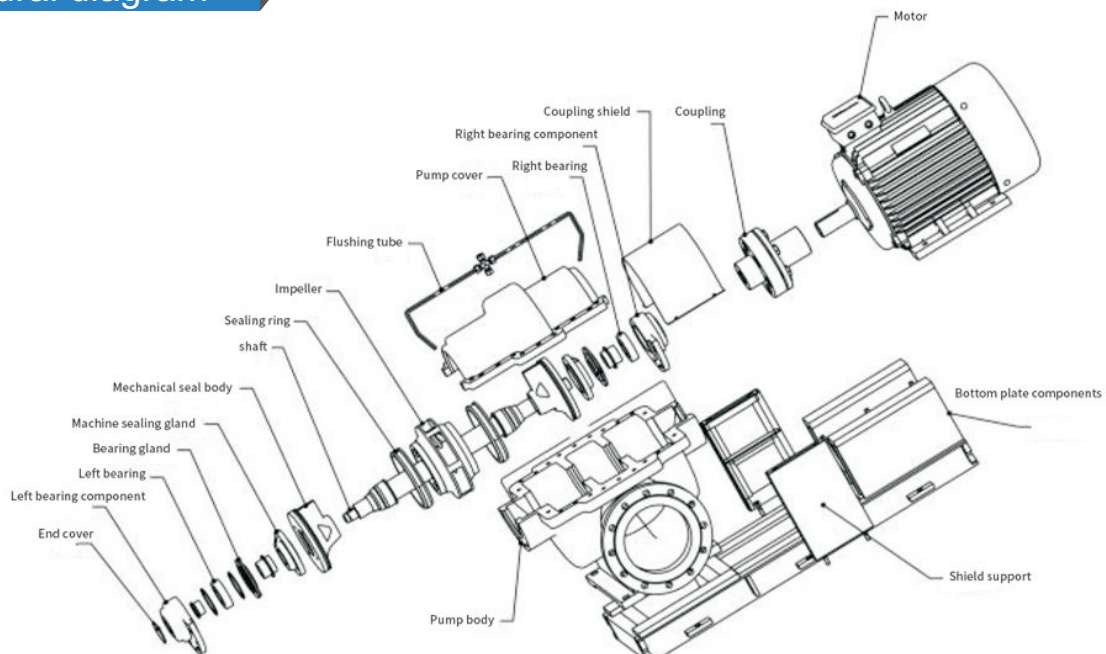

Spectrum diagram

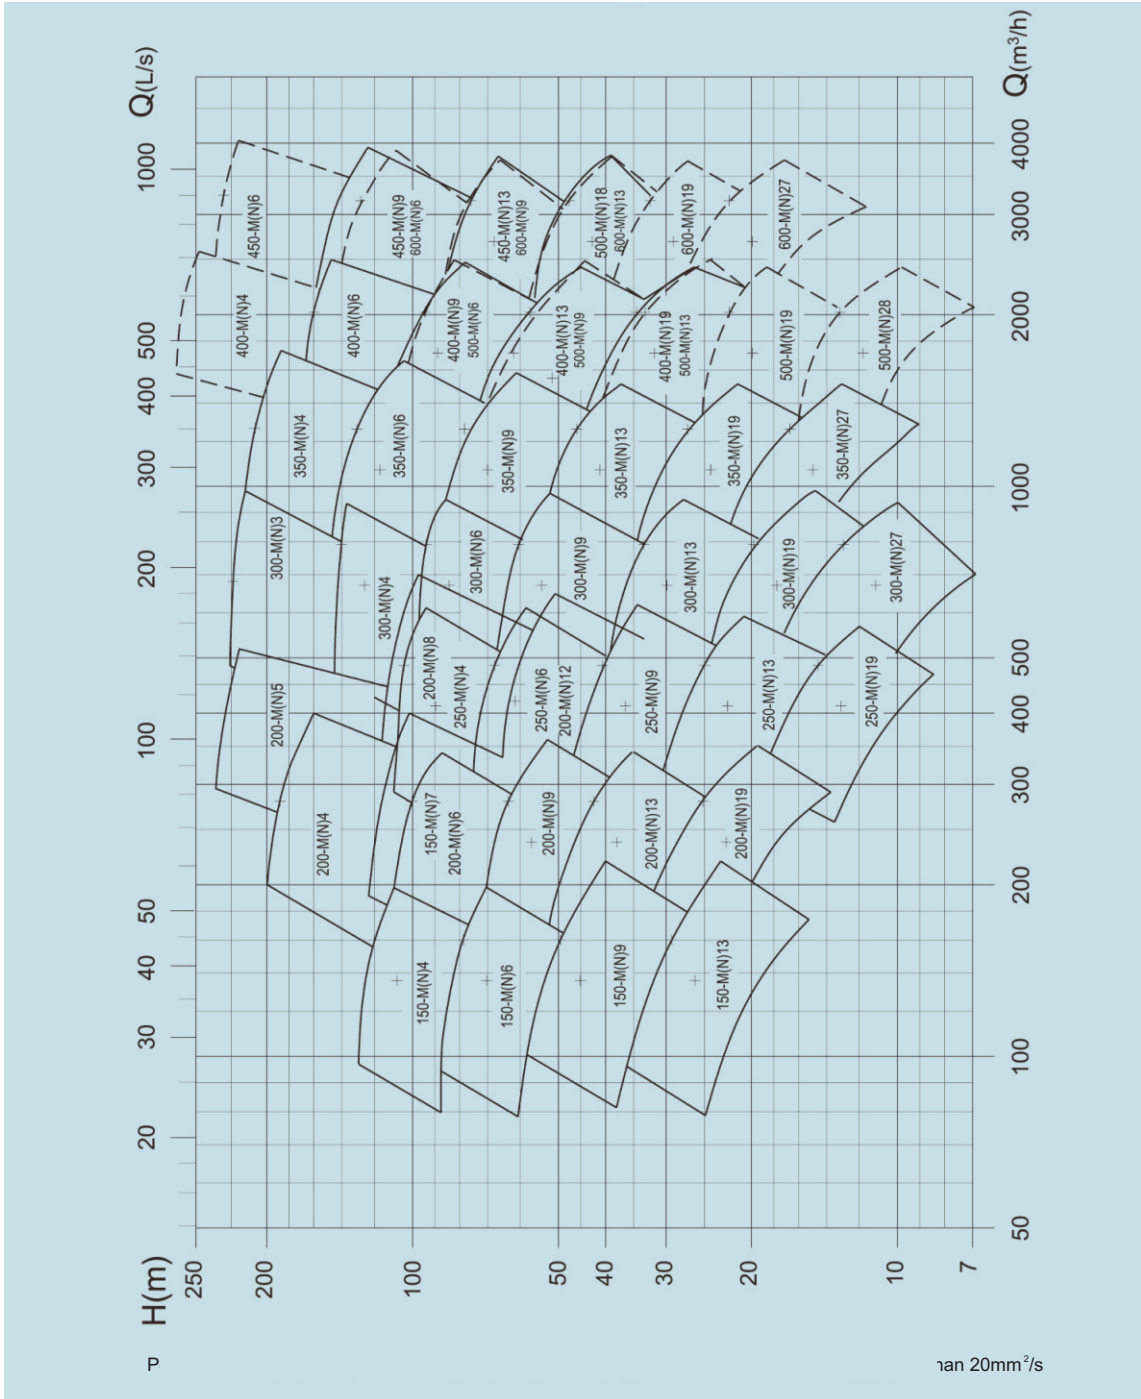

Nate: 1.The inlet diameter is  $\leq 200$ mm,and the motor speed is 2960r/min.  
 2.The inlet diameter is  $> 200$ mm,and the motor speed is 1480r/min.



性能参数表

Model	Specifi-cations	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)		
		m <sup>3</sup> /h	L/S			Shaft power	Motor Power					
JYSN150-M4	310	96	26.7	127	2960	51.0	65	73	10.2	168		
		160	44.4	120		71.6	90				72	
		202	56.1	108		82.5						
	295	91	25.3	114	2960	45.1	63	71	10.0	167		
		152	42.2	108		63.2	75				70	
		192	53.3	97		72.8						
	276	85	23.7	100	2960	38.3	61	69	9.8	165		
		142	39.6	95		53.5	75				68	
		180	49.9	86		61.6						
	257	80	22.1	87	2960	32.1	59	67	9.6	163		
		131	36.9	83		44.1	55				66	
		169	46.6	74		51.9						
JYSN150-N4	310	81	22.6	123	2960	46.6	59	73	10.2	166		
		131	37.7	116		56.8	75				71	
		171	47.6	106		69.3						
	295	77	21.0	111	2960	41.3	57	71	9.9	164		
		124	35.1	105		50.0	75				69	
		163	44.3	96		61.2						
	276	72	19.5	97	2960	35.2	55	69	9.6	163		
		117	32.4	92		42.3	55				67	
		153	40.9	84		51.8						
	257	68	19.5	85	2960	29.7	53	67	9.4	162		
		109	32.4	80		35.4	45				65	
		142	40.9	73		43.3						
JYSN150-M6	245	96	26.7	91	2960	36.0	66	79	4.0	158		
		160	44.4	79		43.6	55				76	
		198	55.0	71		50.4						
	225	88	24.5	75	2960	28.2	64	77	3.8	154		
		147	40.9	66		34.6	45				74	
		182	50.6	60		40.0						
	211	83	22.9	66	2960	23.8	62	75	3.7	151		
		138	38.2	58		29.0	37				72	
		170	47.3	52		33.6						
	201	79	21.9	60	2960	21.3	60	73	3.5	150		
		131	36.4	53		25.8	37				70	
		162	45.1	47		29.9						
JYSN150-N6	245	81	22.6	88	2960	32.9	59	77	3.6	145		
		136	37.7	76		36.5	45				75	
		168	46.7	70		42.3						
	228	76	21.5	76	2960	27.4	57	75	3.5	142		
		126	35.8	66		30.1	37				73	
		156	44.3	60		35.0						
	208	69	19.9	64	2960	21.7	55	73	3.0	140		
		115	33.2	55		23.6	30				71	
		143	41.1	50		27.4						
	201	67	18.6	59	2960	20.2	53	71	3.2	138		
		111	30.9	51		21.8	30				69	
		138	38.3	47		25.4						
JYSN150-M7	332	221	221	146	2960	118.2	74.5	80.5	11.0	234		
		369	369	125		156.0	200				77	
		443	443	108		169.1						
	318	213	213	135	2960	105.8	74	80	10.9	233		
		356	356	115		139.4	160				76	
		427	427	98		149.9						
	305	205	205	120	2960	91.2	73.5	79	10.8	232		
		342	342	102		120.3	132				75.5	
		410	410	85		125.8						
	283	190	190	104	2960	74.1	72.5	78.0	10.7	231		
		316	316	90		99.3	110				75	
		379	379	74		102.6						
260	166	166	88	2960	55.7	71.5	77.0	10.6	230			
	277	277	74		72.5	90				74		
	332	332	64		78.8							
JYSN150-N7	332	171	171	137	2960	89.9	71	78.5	10.5	233		
		285	285	120		118.6	132				75	
		342	342	105		130.4						
	305	159	159	118	2960	73.0	70	77.5	10.3	232		
		265	265	103		95.9	110				74	
		318	318	89		104.2						
	283	150	150	99	2960	58.6	69	76.5	10.1	231		
		250	250	84		74.8	90				73	
		300	300	74		82.8						
	260	140	140	81	2960	45.5	68	75.5	10.0	230		
		234	234	69		58.2	75				72	
		281	281	59		62.7						
JYSN150-M9	206	96	26.7	53	2960	20.3	68	81	4.0	147		
		160	44.4	51		27.4	37				78	
		220	61.1	41		31.5						
	196	91	25.3	48	2960	18.0	66	79	3.9	146		
		152	42.2	45		23.8	30				76	
		209	58.1	36		27.2						
	175	82	22.7	38	2960	13.7	62	75	3.6	145		
		136	37.8	36		18.0	22				72	
		187	51.9	29		20.6						
	167	78	21.6	35	2960	12.2	60	73	3.5	144		
		130	36.0	33		16.0	22				70	
		178	49.5	26		18.3						
JYSN150-N9	206	81	22.6	51	2960	18.5	61	81	3.6	142		
		136	37.7	49		22.5	30				77	
		187	51.9	40		26.5						
	187	74	21.5	42	2960	14.4	59	79	3.5	140		
		124	35.8	41		17.4	22				75	
		170	49.3	33		20.5						
	175	69	19.9	37	2960	12.2	57	77	3.3	139		
		115	33.2	36		14.6	18.5				73	
		159	45.6	29		17.1						
	167	66	18.3	34	2960	10.9	55	75	3.1	138		
		110	30.5	32		12.9	18.5				71	
		151	42.0	26		15.2						
JYSN150-M13	169	96	26.7	37	2960	13.3	73	15.7	22	143		
		160	44.4	30		15.7	22				79	
		220	61.1	20		15.2						
	164	93	25.9	34	2960	12.1	71	14.3	18.5	142		
		155	43.1	27		14.3	18.5				81	
		213	59.3	18		13.6						
	152	86	24.0	29	2960	10.0	69	11.7	15	140		
		144	40.0	24		11.7	15				79	
		198	55.0	15		11.1						
	144	82	22.7	26	2960	8.7	67	10.1	15	138		
		136	37.8	21		9.6	15				73	
		187	51.9	14		9.6						
JYSN150-N13	169	81	22.6	36	2960	12.1	66	12.9	15	141		
		136	37.7	29		12.9	15				83	
		187	51.9	20		12.7						
	157	76	21.5	31	2960	10.0	64	10.7	15	140		
		126	35.8	25		10.7	15				81	
		174	49.3	17		10.5						
	147	71	20.1	27	2960	8.5	62	8.9	11	139		
		118	33.6	22		8.9	11				79	
		162	46.2	15		8.8						
	144	69	19.2	26	2960	8.2	60	8.6	11	138		
		115	32.1	21		8.6	11				77	
		159	44.1	14		8.5						
JYSN200-M4	388	168	46.7	200	2960	145.2	63	207.2	250	10.5	369	
		280	77.8	193		207.2	250					71
		336	93.3	180		245.7						
	360	155	43.1	176	2960	121.7	61	167.9	x 220/200	10.3	365	
		258	71.7	165		195.2	69					
		310	86.1	155		195.2	67					
	328	142	39.4	146	2960	95.7	59	132.3	160	10.1	361	
		236	65.6	138		157.0	67					
		284	78.9	132		157.0	65					
	305	132	36.7	131	2960	81.2	58	61.1	132	9.9	359	
		220	61.1	120		108.9	66					
		250	69.4	112		119.1	64					
283	124	34.4	113	2960	66.9	57	89.3	110	9.7	357		
	207	57.5	103		106.9	65						
	245	68.1	101		106.9	63						
JYSN200-N4	388	143	39.7	196	2960	123.1	62	175.9	220	10.3	368	
		238	66.1	190		206.9	70					
		285	79.2	176		206.9	66					
	360	124	34.4	172	2960	96.8	60	133.2	160	10.0	363	
		208	57.8	160		158.1	68					
		250	69.4	151		158.1	65					
	328	156	43.3	136	2960	99.6	58	107.5	132	9.9	359	
		196	54.4	133		129.5	66					
		236	65.6	127		129.5	63					
	286	114	31.7	109	2960	60.4	56	83.7	110	9.8	356	
		190	52.8	102		98.0	61					
		224	62.2	98		98.0	61					
JYSN200-M5	420	264	73.3	232	2960	252.7	66	337.0	450	8.9	395	
		440	122.2	225		421.8	80					
		528	146.7	220		421.8	75					
	398	250	69.4	208	2960	217.9	65	288.4	400	8.7	390	
		416	115.6	201		360.8	79					
		499	138.6	196		360.8	74					
	378	234	65.0	182	2960	181.5	64	240.7	315	8.5	385	
		390	108.3	177		301.8	78					
		468	130.0	173		301.8	73					
	355	221	61.4	163	2960	130.5	75	207.5	280	8.3	380	
		368	102.2	157		254.2	76					
		442	122.8	154		254.2	73					
336	207	57.5	143	2960	127.6	63	168.8	250	8.1	375		
	345	95.8	138		211.8	77						
	414	115.0	135		211.8	72						
JYSN200-N5	418	225	62.5	216	2960	206.8	64	274.9	355	8.7	390	
		375	104.2	2								



Model	Specifications	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)
		m <sup>3</sup> /h	L/S			Shaft power	Motor Power			
JYSN200-M8	305	318	88.3	125	2960	144.3	75	84	9.6	278
		530	147.2	111		190.7	84			
		636	176.7	95		201.9	81.5			
	292	305	84.7	115	2960	129.1	74	83	9.6	277
		508	141.1	100		166.7	81			
	278	291	80.8	105	2960	112.4	74	82	9.4	276
485		134.7	88	141.7		80.5				
256	263	73.2	89	2960	87.5	73	80.5	9.2	275	
	439	121.9	72		106.9	78				
	527	146.3	63		115.9	72				
235	235	65.3	73	2960	64.9	72	79	9.0	273	
	392	108.9	57		77.0	77				
JYSN200-N8	305	288	80.0	121	2960	126.5	75	83	9.7	276
		480	133.3	100		157.5	80			
		576	160.0	85		166.7	80			
	278	263	73.2	100	2960	96.9	74	82	9.4	275
		439	121.9	84		121.7	79			
	256	241	66.8	83	2960	74.5	73	80	9.2	273
401		111.4	70	95.6		76				
235	214	59.3	66	2960	53.3	72	78	9.0	272	
	356	98.9	55		68.4	74				
	427	118.7	44		69.2	74				
JYSN200-M9	235	168	46.7	73	2960	45.8	73	83	5.9	187
		280	77.8	64		58.8	77			
	223	160	44.3	65	2960	40.0	71	81	5.7	186
		266	73.9	57		51.2	74			
212	151	42.0	59	2960	35.0	69	79	5.5	185	
	252	70.0	51		44.6	72				
200	143	39.7	52	2960	30.4	67	77	5.3	184	
	238	66.1	46		38.6	70				
JYSN200-N9	235	143	39.6	71	2960	41.7	66	83	5.3	184
		238	66.0	62		48.3	76			
	228	138	36.8	66	2960	39.3	64	81	5.0	183
		230	61.4	58		45.2	74			
212	128	35.2	57	2960	32.4	62	79	4.9	181	
	214	58.7	50		37.0	72				
198	121	33.7	51	2960	28.2	60	77	4.7	179	
	202	56.1	44		31.4	70				
JYSN200-M12	246	320	89.0	75	2960	86.1	76	85.5	8.8	250
		534	148.3	61		103.8	82			
	228	298	82.8	65	2960	70.4	75	84	8.7	249
		497	138.1	53		85.4	81			
211	596	165.7	43	2960	86.2	73	82.5	8.6	248	
	272	75.7	56		56.9	78				
195	425	118.1	35	2960	53.0	75	76.5	8.5	246	
	510	141.7	29		55.2	73				
JYSN200-N12	246	284	78.8	76.5	2960	77.8	76	84.5	8.6	250
		473	131.4	61		93.0	82			
	228	266	73.8	67	2960	65.5	74	84	8.5	249
		443	123.1	54		77.6	81			
211	532	147.7	43	2960	76.9	73	82	8.4	248	
	246	68.3	57		52.3	79				
195	410	113.9	45	2960	61.3	75	77	8.3	246	
	492	136.7	37.5		63.6	79				
JYSN200-M13	204	168	46.7	53	2960	34.6	70	85	5.9	220
		280	77.8	43		38.6	81			
	188	155	42.9	44	2960	27.4	68	83	5.5	218
		258	71.6	36		30.3	79			
174	144	39.9	38	2960	22.7	66	86	5.3	216	
	239	66.5	31		24.9	77				
165	292	81.2	26	2960	26.6	77	75	5.1	215	
	136	37.8	34		19.9	64				
JYSN200-N13	204	143	39.6	51	2960	31.6	63	85	5.3	218
		238	66.0	42		31.7	80			
	188	131	37.2	43	2960	25.4	61	83	5.0	217
		219	62.0	35		25.3	78			
180	125	33.9	40	2960	23.0	59	81	4.7	216	
	209	56.4	32		22.7	76				
164	115	32.1	33	2960	18.2	57	79	4.6	215	
	192	53.5	26		17.2	74				
JYSN200-M19	162	168	46.7	31	2960	17.5	30	80	5.9	220
		280	77.8	26		23.3	77			
		342	95.0	19		23.3	75			
	155	161	44.8	28	2960	15.9	28	83	5.7	219
		269	74.7	23		20.5	75			
	146	328	91.2	18	2960	21.1	22	81	5.5	218
151		42.0	25	13.4		73				
138	252	70.0	20	2960	17.3	18.5	79	5.3	217	
	308	85.5	16		17.9	71				
162	143	39.7	22	2960	11.6	30	85	5.3	219	
	238	66.1	18		14.9	76				
	291	80.8	14		15.5	71				
155	143	39.6	30	2960	15.9	22	83	5.1	218	
	238	66.0	25		19.2	70				
	290	80.6	19		19.5	74				
146	136	38.0	27	2960	14.3	18.5	81	5.0	217	
	227	63.4	23		17.1	68				
	277	77.4	17		17.5	72				
135	128	36.8	24	2960	12.3	15	79	4.7	216	
	214	61.4	20		14.7	70				
JYSN250-M4	595	301	83.6	122	1480	156.2	280	64	5.1	599
		491	136.4	115		207.7	74			
	565	589	163.6	103	1480	232.6	220	76	5.0	597
		291	80.8	106		131.2	64			
540	485	134.7	100	1480	173.7	185	76	4.9	594	
	582	161.7	91		199.4	71				
503	279	77.6	97	1480	118.9	160	60	4.8	591	
	466	129.3	91		151.8	69				
473	259	71.9	83	1480	97.9	132	73	4.7	589	
	432	119.9	79		125.8	68				
JYSN250-N4	595	244	67.9	74	1480	85.2	185	58	4.9	596
		407	113.2	70		106.3	71			
	531	488	135.6	64	1480	124.9	160	74	4.8	593
		258	71.7	118		148.0	56			
497	432	120.0	110	1480	177.2	110	73	5.0	598	
	518	143.9	100		201.4	70				
475	247	68.6	103	1480	119.7	132	58	4.6	588	
	415	115.3	63		104.1	68				
JYSN250-M6	473	302	83.9	84	1480	97.3	185	71	3.5	518
		493	136.9	75		129.0	78			
	447	631	175.3	67	1480	153.4	160	75	3.4	516
		291	80.8	77		84.7	72			
437	485	134.7	66	1480	108.9	132	80	3.3	514	
	612	170.0	59		129.3	76				
410	282	78.4	72	1480	77.4	110	71	3.0	510	
	470	130.7	64		103.3	79				
383	594	164.9	55	1480	118.3	90	75	2.9	508	
	265	73.6	63		65.8	69				
JYSN250-M9	473	441	122.6	56	1480	87.5	160	67	3.1	517
		550	152.8	48		99.1	73			
	356	247	68.7	55	1480	55.2	75	67	3.0	515
		412	114.5	49		73.2	71			
447	230	63.9	47	1480	45.0	110	66	2.8	509	
	383	106.4	42		59.6	74				
327	483	134.3	36	1480	68.5	75	59	2.6	507	
	258	71.7	83		88.3	66				
367	432	120.0	75	1480	114.5	75	67	3.0	513	
	535	148.6	67		133.7	73				
428	252	70.0	75	1480	76.3	110	67	3.0	511	
	420	116.7	64		91.5	75				
410	520	144.4	57	1480	107.2	90	65	2.9	511	
	239	66.4	67		67.1	73				
383	399	110.8	59	1480	82.2	75	81	3.2	399	
	504	140.0	52		97.7	72				
356	229	63.7	62	1480	61.4	75	63	2.8	509	
	382	106.2	54		73.3	61				
327	482	134.0	48	1480	87.3	55	68	3.1	396	
	214	59.5	54		51.6	76				
300	357	99.2	47	1480	60.6	45	77	3.0	395	
	451	125.1	42		71.9	71				
367	199	55.3	47	1480	42.9	75	59	2.6	507	
	332	92.2	41		49.9	74				
349	419	116.3	36	1480	59.4	75	69	3.4	402	
	291	80.8	46		50.1	72				
327	485	134.7	41	1480	64.7	75	83	3.2	399	
	612	170.0	34		71.					



Model	Specifi-cations	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)	Model	Specifi-cations	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)																		
		m <sup>3</sup> /h	L/S			Shaft power	Motor Power						m <sup>3</sup> /h	L/S			Shaft power	Motor Power																					
JYSN250-N9	367	247	68.6	44	1480	45.7	75	65	3.0	401	JYSN300-N4	690	411	114.1	146	1480	233.2	450	70	4.2	1001	412	114.3	39	53.1	83	685	190.2	143	79	519	144.2	33	60.3	78	815	226.3	138	76
		230	65.8	38		38.0	63	402					111.7	140	225.8		68	665	670			186.2	136	1480	317.4	400	78	4.2	999	804	223.4	130	49.7	76	804	223.4	130	75	
		383	109.7	34		43.8	81	31.0					45	61	2.8		395	638	386			110.0	129	1480	199.7	355	68	4.1	997	644	183.4	125	35.5	79	644	183.4	125	78	447
	341	205	56.9	30	28.8	37	59	75	3.4	382		612	370	106.1	119	1480	178.4	315	67	4.0	994	617	176.9	115	30.2	77	617	176.9	115	77	415	115.3	21	32.9	72	740	212.3	110	74
		291	80.8	29	30.6	45	86	75	3.4	382		585	354	100.6	109	1480	158.5	280	66	3.9	992	590	167.6	105	36.9	82	590	167.6	105	76	582	161.7	24	38.7	82	708	201.1	101	73
		274	76.0	26	26.8	37	73	73	3.2	380		559	338	97.2	99	1480	140.0	250	65	3.8	989	676	194.4	92	32.7	84	676	194.4	92	72	547	152.0	17	31.7	80	676	194.4	92	72
	268	256	71.1	23	22.3	30	72	72	3.1	378		530	474	131.7	98	1480	178.2	315	71	4.6	848	790	219.4	94	27.1	83	790	219.4	94	81	427	118.6	19	27.1	79	948	263.3	86	78
		239	66.3	20	18.5	30	70	70	2.9	376		509	455	126.4	91	1480	166.2	280	68	4.5	846	910	252.8	79	22.5	81	910	252.8	79	75	477	132.6	13	21.9	77	910	252.8	79	75
		247	68.8	28	28.0	37	68	68	3.0	381		482	431	119.8	82	1480	148.1	250	65	4.4	844	719	199.7	78	30.3	86	719	199.7	78	75	494	137.2	20	32.5	81	863	239.6	71	72
	260	227	65.8	24	22.4	30	66	66	2.9	379		456	408	113.2	73	1480	130.0	220	63	4.2	842	679	188.7	69	24.1	84	679	188.7	69	70	454	131.7	17	25.9	79	815	226.5	63	70
		217	63.1	22	20.3	30	64	64	2.8	377		443	398	110.6	70	1480	126.2	185	60	4.1	840	664	184.3	65	21.6	82	664	184.3	65	70	435	126.2	15	23.3	77	790	221.2	58	68
		202	56.2	19	16.9	22	62	62	2.6	375		530	402	111.7	95	1480	162.6	250	64	4.2	847	804	223.4	83	16.9	80	804	223.4	83	77	337	93.7	16	17.9	80	804	223.4	83	77
245	291	80.8	18	18.7	30	75	75	3.4	312	509	386	107.3	87	1480	148.5	250	62	4.1	845	644	178.8	84	22.4	86	644	178.8	84	79	582	161.7	12	23.5	81	772	214.5	76	75		
	276	76.8	17	17.5	30	73	73	3.2	310	488	370	102.8	80	1480	137.4	220	59	3.9	843	617	171.3	77	20.9	84	617	171.3	77	76	553	153.6	11	21.0	79	740	205.6	70	72		
	461	128.0	14	20.9	30	84	84	3.2	310	445	338	93.8	67	1480	110.2	160	56	3.7	839	740	205.6	70	13.5	64	740	205.6	70	73	527	144.3	14	13.5	71	676	187.7	59	69		
216	427	118.6	11	16.0	18.5	82	82	3.1	308	445	474	131.7	68	1480	124.9	185	70	4.6	606	790	219.4	60	14.8	80	790	219.4	60	84	512	142.3	9	15.6	77	972	270.0	53	80		
	247	68.7	13	12.5	18.5	69	69	3.0	307	423	450	125.1	61	1480	110.2	160	68	4.5	604	495	137.4	8	14.5	75	751	208.5	55	82	495	137.4	8	14.5	75	923	256.5	47	78		
	412	114.5	11	14.8	18.5	80	80	3.0	307	387	412	114.6	51	1480	87.2	132	66	4.2	602	494	137.2	12	19.7	80	687	190.9	46	80											
228	230	65.2	15	14.2	18.5	66	66	2.9	309	356	379	105.3	43	1480	69.9	110	64	4.0	600	459	130.3	10	16.3	78	846	234.9	39	76	217	61.7	13	12.4	64	379	105.3	43	69		
	362	102.9	11	13.1	18.5	82	82	2.8	307	445	632	175.6	39	1480	85.3	110	78	4.0	600	435	123.5	9	14.1	76	778	216.0	33	74	210	58.3	12	11.5	62	778	216.0	33	74		
	350	97.2	10	12.1	15	80	80	2.7	306	418	402	111.7	66	1480	114.0	160	63	4.2	605	420	116.6	8	13.1	74	825	229.1	52	79	420	116.6	8	13.1	74	825	229.1	52	79		
816	474	131.7	225	476.1	800	61	61	5.3	1388	418	378	108.4	58	1480	97.7	132	61	4.1	603	630	180.6	52	11.5	62	630	180.6	52	82	790	219.4	220	67.6	70	775	222.2	46	77		
	790	219.4	220	676.2	800	70	70	5.3	1388	392	354	99.4	51	1480	82.9	110	59	3.9	601	726	203.9	40	799.9	66.5	726	203.9	40	75	909	252.4	215	799.9	66.5	909	252.4	215	75		
	459	127.5	205	427.1	710	60	60	5.2	1385	356	322	89.4	42	1480	64.5	90	57	3.6	599	660	183.3	38	375.9	59.5	660	183.3	38	73	442	122.7	186	375.9	59.5	442	122.7	186	73		
738	736	204.4	180	538.5	630	67	67	5.1	1381	348	474	131.7	40	1480	72.0	90	71	4.6	716	846	235.1	174	617.0	65	846	235.1	174	83	424	117.8	166	330.6	58	424	117.8	166	70		
	707	196.4	160	473.9	560	65	65	5.0	1376	331	450	125.1	36	1480	62.6	90	70	4.5	714	813	225.8	153	537.7	63	813	225.8	153	86	707	196.4	160	473.9	63	707	196.4	160	82		
	813	225.8	153	537.7	560	63	63	5.0	1376	313	427	118.5	32	1480	54.0	75	69	4.3	712	901	250.2	25	799.9	66.5	901	250.2	25	82	402	111.7	214	390.5	60	402	111.7	214	75		
816	670	186.1	210	563.5	710	68	68	5.3	1387	313	427	118.5	32	1480	54.0	75	69	4.3	712	777	215.9	205	667.5	65	777	215.9	205	81	388	107.8	194	353.6	58	388	107.8	194	68		
	647	179.7	190	499.7	630	67	67	5.2	1385	289	393	109.3	27	1480	43.0	55	68	4.1	710	751	208.5	185	590.8	64	751	208.5	185	84	647	179.7	190	499.7	64	647	179.7	190	80		
	751	208.5	185	590.8	630	64	64	5.2	1385	348	402	111.7	38	1480	65.7	90	64	4.2	715	625	173.6	170	435.1	58	625	173.6	170	87											
738	625	173.6	170	435.1	560	66.5	66.5	5.1	1382	348	402	111.7	38	1480	65.7	90	64	4.2	715	731	203.1	165	517.5	63.5	731	203.1	165	82	424	117.8	166	330.6	58	424	117.8	166	70		
	361	100.3	156	269.2	500	57	57	5.0	1378	334	386	105.0	35	1480	59.0	75	63	4.0	713	602	167.2	150	378.3	65	602	167.2	150	86	710	197.3	144	449.3	62	710	197.3	144	81		
	489	135.8	153	286.9	500	71	71	4.6	1003	303	350	98.3	29	1480	44.6	55	62	3.8	711	970	269.4	142	487.0	77	970	269.4	142	80	815	226.4	150	421.3	79	815	226.4	150	85		
690	815	226.4	150	421.3	500	79	79	4.6	1003	289	583	163.9	25	1480	46.5	55	85	3.7	709	928	263.3	133	442.3	76	928	263.3	133	79	474	131.7	145	267.0	70	474	131.7	145	61		
	790	219.4	140	386.5	450	78	78	4.6	1000	285	556	154.5	23	1480	40.9	55	84	3.7	709	928	263.3	133	442.3	76	928	263.3	133	79	928	263.3	133	442.3	76	928	263.3	133	79		
	465	129.0	139	255.0	450	69	69	4.6	998	285	474	131.7	24	1480	40.2	55	77	4.6	438	929	258.1	131	440.5	75	929	258.1	131	80	774	215.1	135	368.5	77	774	215.1	135	74		
618	441	122.5	125	224.4	400	67	67	4.4	995	271	474	131.7	24	1480	40.2	55	77	4.6	438	882	244.9	118	386.7	73	882	244.9	118	80	703	195.3	111	291.1	73	703	195.3	111	71		
	422	117.2	115	202.7	355	65	65	4.3	993	257	427	118.5	19	1480	31.8	45	71	4.3	434	844	234.4	108	348.5	71	844	234.4	108	74	398	110.6	102	175.9	63	398	1				



Model	Specifications	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)				
		m <sup>3</sup> /h	L/S			Shaft power	Motor Power							
JYSN300-N19	285	402	111.7	23	1480	36.7	45	69	4.2	437				
		670	186.2	19		40.2	87							
		804	223.4	13		36.7	79							
	271	382	108.4	20		31.4	66							
		637	180.6	16		33.0	84							
		764	216.7	12		32.8	76							
	254	358	101.7	18		28.3	63							
		597	169.4	15		30.4	81							
		716	203.3	11		28.0	73							
	242	342	95.0	17		25.9	60							
		570	158.3	14		27.5	78							
		684	189.9	10		25.4	70							
JYSN300-M27	251	474	131.7	18	1480	32.7	37	70	4.6	436				
		790	219.4	13		32.0	84							
		948	263.3	10		32.3	80							
	233	441	122.5	15		27.0	68							
		735	204.1	11		26.4	82							
		882	244.9	8		25.0	78							
	223	422	117.2	14		24.4	66							
		703	195.3	10		23.7	80							
		844	234.4	7		22.5	76							
	213	403	111.9	13		21.9	64							
		672	186.5	9		21.2	78							
		806	223.8	7		20.1	74							
JYSN300-N27	251	402	111.7	17	1480	29.8	37	63	4.2	435				
		670	186.2	12		26.3	84							
		804	223.4	10		27.1	79							
	238	382	106.1	15		26.4	61							
		637	176.9	11		23.1	82							
		764	212.3	9		23.8	77							
	213	342	100.6	12		19.5	59							
		570	167.6	9		17.0	80							
		684	201.1	7		17.5	75							
	JYSN350-M4	765	756	210.0		220	1480	686.3			1250	66	5.9	1998
			1260	350.0		210		889.6			81			
			1660	461.1		192		1157.3			75			
718		733	203.7	195	599.1	65								
		1222	339.5	185	769.7	80								
		1610	447.3	163	965.9	74								
693		703	195.3	172	514.6	64								
		1172	325.5	163	658.4	79								
		1544	428.8	145	835.1	73								
666		673	186.9	157	456.6	63								
		1121	311.5	147	575.5	78								
		1477	410.4	130	726.5	72								
JYSN350-N4	765	641	178.2	218	1480	577.0	1000	66	5.6	1995				
		1069	297.0	207		753.4	80							
		1380	391.3	183		929.4	74							
	718	616	106.1	194		500.5	65							
		1026	176.9	182		643.9	79							
		1325	212.3	155		766.0	73							
	693	590	100.6	170		426.9	64							
		984	167.6	158		542.6	78							
		1270	201.1	131		629.1	72							
	666	520	144.3	143		321.3	63							
		866	240.6	135		413.5	77							
		1141	316.9	110		481.4	71							
JYSN350-M6	654	756	210.0	148	1480	461.5	710	66	6.3	1586				
		1260	350.0	126		527.3	82							
		1660	461.1	106		630.5	76							
	634	733	203.7	139		427.7	65							
		1222	339.5	120		493.1	81							
		1610	447.5	98		573.1	75							
	608	703	195.3	128		382.8	64							
		1172	325.5	110		438.8	80							
		1544	428.8	90		511.9	74							
	583	673	186.9	117		340.8	63							
		1121	311.5	103		398.8	79							
		1477	410.4	83		454.8	73							
543	627	174.3	102	285.5	61									
	1046	290.5	88	325.5	77									
	1378	382.7	72	379.3	71									
531	612	170.1	97	269.8	60									
	1021	283.5	85	312.5	76									
	1345	373.5	68	357.6	70									
JYSN350-N6	653	641	178.2	143	1480	421.1	500	59	5.7	1585				
		1069	297.0	121		429.6	82							
		1380	391.3	95		474.5	75							
	627	616	171.1	132		385.5	57							
		1026	285.0	112		389.6	80							
		1325	368.1	88		431.3	73							
	601	590	163.9	121		345.3	56							
		984	273.3	102		347.3	79							
		1270	352.8	80		384.8	72							
	575	565	152.4	111		313.3	54							
		941	253.9	94		311.8	77							
		1214	334.5	74		346.4	70							
530	520	144.3	94	253.7	52									
	865	240.6	79	248.4	75									
	1141	316.9	65	295.7	68									
JYSN350-M9	503	756	210.0	86	1480	252.9	355	70	6.3	1208				
		1260	350.0	77		310.8	85							
		1512	420.0	68		345.7	81							
	473	711	197.4	77		216.0	69							
		1184	329.0	69		265.1	84							
		1421	394.8	61		295.1	80							
	453	680	189.0	71		193.5	68							
		1134	315.0	63		235.5	83							
		1361	378.0	55		258.0	79							
	433	650	180.6	62		164.9	67							
		1084	301.0	58		208.0	82							
		1300	361.2	52		236.1	78							
415	624	173.3	57	147.8	66									
	1040	288.8	53	185.9	81									
	1247	346.5	46	202.9	77									

Model	Specifications	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)				
		m <sup>3</sup> /h	L/S			Shaft power	Motor Power							
JYSN350-N9	502	641	178.2	83	1480	230.2	315	63	5.7	1207				
		1069	297.0	74		253.5	85							
		1283	356.4	67		291.9	80							
	477	609	106.1	75		203.8	61							
		1016	176.9	66		219.9	83							
		1219	212.3	59		249.6	78							
	452	577	100.6	67		176.2	60							
		962	167.6	59		188.5	82							
		1155	201.1	53		215.9	77							
	437	558	152.4	63		162.3	59							
		940	253.9	56		177.0	81							
		1116	334.5	50		199.5	76							
415	529	147.0	56	140.4	58									
	882	245.0	50	151.2	80									
	1058	294.0	46	174.8	75									
JYSN350-M13	406	756	210.0	54	1480	148.7	200	75	6.3	1110				
		1260	350.0	46		180.8	87							
		1512	420.0	38		197.9	80							
	390	726	201.6	50		133.3	74							
		1210	336.0	42		161.8	86							
		1452	403.2	34		168.1	79							
	357	665	184.8	42		105.6	72							
		1109	308.0	35		127.6	84							
		1331	369.6	28		132.9	77							
	333	620	172.2	36		87.9	70							
		1033	287.0	31		105.8	82							
		1240	344.4	25		110.4	75							
JYSN350-N13	406	641	178.2	52	1480	135.7	185	68	5.7	1109				
		1069	297.0	44		148.5	87							
		1283	356.4	38		166.2	79							
	386	609	174.6	47		118.1	67							
		1016	291.0	40		128.8	86							
		1219	349.3	34		144.3	78							
	361	571	162.2	42		100.1	65							
		952	270.3	35		108.4	84							
		1142	324.3	30		121.8	76							
	341	539	149.7	37		86.9	63							
		898	249.5	31		93.4	82							
		1078	299.4	27		105.1	74							
340	756	210.0	35	98.7	73									
	1260	350.0	28	109.2	88									
	1512	420.0	22	111.8	81									
JYSN350-M19	326	726	201.6	32	1480	88.2	110	71	6.2	676				
		1210	336.0	25		95.6	86							
		1452	403.2	20		98.5	79							
	303	673	186.9	27		72.3	69							
		1121	311.5	21		78.0	84							
		1346	373.8	17		80.5	77							
	289	643	178.5	25		64.9	67							
		1071	297.5	20		69.6	82							
		1285	357.0	15		72.0	75							
	JYSN350-N19	340	641	178.2		34	1480	90.1			110	66	5.7	677
			1069	297.0		27		89.7			88			
			1283	356.4		22		93.9			80			
320		603	169.3	30	77.2	64								
		1005	282.1	24	76.2	86								
		1206	338.6	19	80.0	78								
296		558	160.4	26	63.2	62								
		930	267.3	21	61.9	84								
		1116	320.7	16	65.1	76								
289		545	151.5	24	60.9	60								
		909	252.4	20	59.1	82								
		1091	302.9	16	62.4	74								
JYSN350-M27	290	756	210.0	23	1480	60.5	75	78	6.3	637				
		1260	350.0	17		65.7	87							
		1512	420.0	14		74.8	77							
	273	711	197.4	20		51.6	76							
		1184	329.0	15		55.9	85							
		1421	394.8	11		58.0	75							
	255	665	184.8	18		44.1	73							
		1109	308.0	13		47.5	82							
		1331	369.6	10		49.5	72							
	247	643	178.5	17		40.2	72							
		1071	297.5	12		43.4	81							
		1285	357.0	9		45.3	71							
JYSN350-N27	290	641	178.2	22	1480	55.2	70	70	5.7	636				
		1069	297.0	16		54.0	87							
		1283	356.4	14		62.9	76							
	267	590	169.3	19		44.2	68							
		984	282.1	14		43.0	85							
		1180	338.6	12		50.3	74							
	247	545	156.8	16		36.5	65							
		909	261.3	12		35.2	82							
		1091	313.6	10		41.3	71							
	JYSN400-M6	725	1211	336.3		180	1480	760.9			1250	78	5.0	1954
			2018	560.6		160		1034.5			85			
			2523	700.7		151		1234.9			84			
675		1151	319.7	157	630.8	78								
		1918	523.8	137	841.9	85								
		2398	666.0	120	944.0	83								
620		1019	303.0	130	495.1	78								
		1818	505.0	111	654.2	84								
		2273	631.3	97	732.1	82								
570		1025	284.7	108	391.4	77								
		17												



Model	Specifications	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)
		m <sup>3</sup> /h	L/S			Shaft power	Motor Power			
JYSN400-N6	724	1079	299.7	176	1480	662.9	1120	78	4.8	1952
		1798	499.4	150		874.4		84		
		2248	624.3	134		1012.6		81		
	674	983	273.0	146	1480	514.2	800	76	4.7	1948
		1638	455.0	125		671.8		83		
		2048	568.8	108		743.5		81		
	619	929	258.0	123	1480	409.4	630	76	4.6	1944
		1548	430.0	105		533.3		83		
		1935	537.5	89		579.0		81		
	570	875	243.0	98	1480	315.5	450	74	4.5	1941
		1458	405.0	81		392.2		82		
		1823	506.3	67		421.9		80		
JYSN400-M9	573	1211	336.3	107	1480	446.6	710	79	6.0	1730
		2018	560.6	94		600.7		86		
		2523	700.7	81		670.4		83		
	526	1123	312.0	89	1480	349.0	560	78	5.9	1728
		1872	520.0	77		461.8		85		
		2340	650.0	66		506.7		83		
	486	1075	298.7	74	1480	281.4	400	77	5.8	1725
		1792	497.8	63		361.7		85		
		2240	622.2	53		394.3		82		
	446	1045	290.3	62	1480	238.5	315	74	5.7	1723
		1742	483.9	51		291.5		83		
		2125	590.3	41		308.2		77		
JYSN400-N9	585	1110	308.3	112	1480	434.1	630	78	5.9	1730
		1850	513.9	92		545.3		85		
		2313	642.4	74		582.5		80		
	573	1039	288.7	96	1480	348.3	500	78	5.8	1728
		1732	481.1	80		443.9		85		
		2165	601.4	67		481.7		82		
	526	943	262.0	82	1480	277.1	400	76	5.7	1726
		1572	436.7	68		342.5		85		
		1965	545.8	58		378.5		82		
	486	901	250.3	70	1480	235.3	315	73	5.6	1724
		1502	417.2	59		290.8		83		
		1878	521.5	49		309.3		81		
JYSN400-M13	481	1215	337.5	71	1480	313.2	450	75	7.3	1652
		2025	562.5	59		374.0		87		
		2520	700.0	51		416.7		84		
	470	1211	336.3	65	1480	282.0	355	76	7.2	1650
		2018	560.6	52		324.7		88		
		2502	695.1	43		344.7		85		
	438	1148	319.0	57	1480	240.9	315	74	7.1	1647
		1914	531.7	45		272.7		86		
		2393	664.6	37		290.5		83		
	406	1082	300.7	47	1480	189.8	250	73	7.0	1642
		1804	501.1	37		216.4		84		
		2255	626.4	27		215.3		77		
374	1016	282.3	38	1480	146.1	185	72	6.9	1640	
	1694	470.6	28		161.5		80			
	2118	588.2	20		155.9		74			
JYSN400-N13	481	1047	290.8	68	1480	255.1	355	76	7.0	1650
		1745	484.7	57		311.3		87		
		2181	605.9	47		340.5		82		
	470	1039	288.7	63	1480	231.6	315	77	7.0	1648
		1732	481.1	52		277.6		88		
		2165	601.4	41		284.4		85		
	438	979	272.0	56	1480	199.1	250	75	6.9	1646
		1632	453.3	45		229.9		87		
		2040	566.7	34		233.2		81		
	406	922	256.2	48	1480	165.1	200	73	6.8	1641
		1537	426.9	38		189.4		84		
		1921	533.7	29		189.7		80		
374	859	238.7	39	1480	125.0	185	73	6.7	1639	
	1432	397.8	31		151.1		80			
	1790	497.2	23		147.5		76			
JYSN400-M19	402	1211	336.3	43	1480	194.2	220	73	8.5	1195
		2018	560.6	32		202.1		87		
		2523	700.7	24		208.7		79		
	377	1181	328.0	37	1480	163.0	185	73	8.4	1193
		1968	546.7	27		170.2		85		
		2460	683.3	19		163.2		78		
	352	1151	319.7	31	1480	134.9	160	72	8.3	1191
		1918	532.8	22		138.4		83		
		2398	666.0	13		108.8		78		
	337	1121	311.3	25	1480	107.5	110	71	8.2	1191
		1868	518.9	16		101.7		80		
		2335	648.6	8		69.7		73		
JYSN400-N19	402	1039	288.7	39	1480	149.2	185	74	8.0	1194
		1732	481.1	31		170.0		86		
		2165	601.4	24		170.5		83		
	377	985	273.7	34	1480	125.0	160	73	7.9	1192
		1642	456.1	27		143.7		84		
		2053	570.1	20		141.5		79		
	352	943	262.0	29	1480	103.5	132	72	7.8	1190
		1572	436.7	23		120.1		82		
		1965	545.8	16		109.8		78		
	337	901	250.3	25	1480	86.4	110	71	7.7	1189
		1502	417.2	18		94.4		78		
		1878	521.5	12		82.9		74		
JYSN450-M9	673	1907	529.6	164	1480	1077.4	1600	79	6.5	2518
		3178	882.7	144		1432.5		87		
		3813	1059.2	127		1590.9		83		
	615	1796	499.0	135	1480	845.5	1250	78	6.4	2516
		2994	831.6	116		1103.8		86		
		3593	998.0	101		1206.4		82		
	568	1718	477.1	113	1480	693.1	1000	76	6.3	2513
		2863	795.2	95		871.2		85		
		3435	954.3	83		955.5		81		
	518	1655	459.9	95	1480	571.0	800	75	6.2	2510
		2759	766.4	77		689.3		84		
		3311	919.7	66		751.9		79		

Model	Specifications	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)
		m <sup>3</sup> /h	L/S			Shaft power	Motor Power			
JYSN450-N9	673	1693	470.2	147	1480	869.1	1250	78	6.3	2518
		2821	783.6	123		1107.7		85		
		3385	940.3	107		1220.5		81		
	615	1583	439.8	123	1480	689.8	1000	77	6.2	2516
		2639	733.1	103		878.2		84		
		3167	879.7	87		941.4		80		
	568	1487	413.1	107	1480	587.0	800	74	6.1	2513
		2479	688.6	87		710.2		83		
		2975	826.3	75		769.8		79		
	518	1401	389.2	89	1480	464.4	630	73	6.0	2510
		2335	648.6	73		564.3		82		
		2802	778.4	63		614.5		78		
JYSN450-M13	538	1908	530.0	89	1480	600.6	900	77	10.5	1840
		3180	883.3	76		739.5		89		
		3975	1104.2	64		824.8		84		
	502	1776	493.3	80	1480	502.5	710	77	10.3	1838
		2960	822.2	66		611.5		87		
		3700	1027.8	54		655.6		83		
	465	1716	476.7	69	1480	424.3	560	76	10.2	1836
		2860	794.4	55		498.1		86		
		3575	993.1	41		518.4		77		
	428	1614	448.3	56	1480	328.2	450	75	10.0	1834
		2690	747.2	44		413.2		78		
		3363	934.0	33		397.6		76		
JYSN450-N13	538	1614	448.3	39	1480	501.5	710	78	10.0	1839
		2690	747.2	73		607.7		88		
		3363	934.0	62		660.2		86		
	502	1494	415.0	80	1480	428.3	560	76	9.8	1837
		2490	691.7	66		514.4		87		
		3113	864.6	51		527.2		82		
	465	1392	386.7	69	1480	348.8	450	75	9.6	1835
		2320	644.4	56		416.3		85		
		2900	805.6	46		443.0		82		
	428	1368	380.0	57	1480	283.1	400	75	9.5	1833
		2280	633.3	46		344.1		83		
		2850	791.7	35		357.4		76		
JYSN500-M18	460	1902	528.3	59	1480	413.0	500	74	9.8	1380
		3170	880.6	48		470.9		88		
		3963	1100.7	36		468.0		83		
	431	1836	510.0	49	1480	335.6	450	73	9.6	1378
		3060	850.0	39		377.9		86		
		3825	1062.5	31		398.7		81		
	402	1794	498.3	42	1480	285.0	355	72	9.5	1376
		2990	830.6	32		310.2		84		
		3738	1038.2	22		279.9		80		
	385	1734	481.7	36	1480	242.9	280	70	9.3	1374
		2890	802.8	25		242.9		81		
		3613	1003.5	17		226.0		74		
JYSN500-N18	460	1614	448.3	57	1480	334.1	450	75	9.2	1378
		2690	747.2	46		387.3		87		
		3363	934.0	36		392.4		84		
	431	1536	426.7	50	1480	286.5	355	73	9.0	1376
		2560	711.1	40		328.1		85		
		3200	888.9	30		318.8		82		
	402	1494	415.0	43	1480	249.9	280	70	8.9	1374
		2490	691.7	32		264.6		82		
		3113	864.6	24		264.2		77		
	385	1386	385.0	37	1480	205.4	250	68	8.8	1372
		2310	641.7	28		223.0		79		
		2888	802.1	20		209.7		75		
JYSN500-M6	860	1212	336.7	108	990	488.3	800	73	5.0	2408
		2020	561.1	100		662.8		83		



Model	Specifications	Flowrate		Head (m)	Speed (r/min)	Power(KW)		Efficiency (%)	NPSHr (m)	Weight (kg)
		m <sup>3</sup> /h	L/S			Shaft power	Motor Power			
JYSN500-N9	675	1028	285.7	66	990	262.6	355	70	4.5	2246
		1714	476.1	58		313.1		86		
		2057	571.3	52		354.5		82		
	647	987	274.2	60	990	240.1	315	67	4.3	2244
		1645	457.1	52		280.7		83		
		1975	548.5	46		312.4		79		
613	936	265.7	55	990	216.4	280	64	4.3	2242	
	1560	442.8	47		249.6		80			
	1872	531.3	41		274.4		76			
587	895	257.1	52	990	203.7	250	62	4.2	2240	
	1491	428.5	44		227.4		78			
	1789	514.2	38		249.7		74			
574	874	242.8	50	990	197.7	250	60	4.0	2238	
	1457	404.7	42		217.6		76			
	1748	485.6	36		237.5		72			
JYSN500-M13	530	1212	336.7	46	990	194.7	280	78	5.0	2220
		2020	561.1	36		225.0		88		
		2424	673.3	29		227.9		84		
	519	1188	329.9	44	990	183.4	250	77	4.9	2218
		1980	549.9	34		210.4		87		
		2376	659.9	27		210.4		83		
	498	1139	316.5	40	990	164.0	220	76	4.8	2216
		1899	527.4	31		187.9		86		
		2279	632.9	24		181.6		82		
	477	1091	303.0	37	990	145.9	185	75	4.6	2214
		1818	505.0	29		166.8		85		
		2182	606.0	23		168.7		81		
461	1054	292.9	34	990	133.5	185	74	4.5	2212	
	1757	488.2	27		152.5		84			
	2109	585.8	21		150.8		80			
440	1006	279.4	31	990	117.5	160	73	4.4	2210	
	1677	465.7	24		134.0		83			
	2012	558.9	19		131.8		79			
JYSN500-N13	530	1028	285.7	45	990	177.6	220	70	4.5	2218
		1714	476.1	35		184.8		88		
		2057	571.3	28		191.4		83		
	504	977	274.2	40	990	156.8	185	68	4.3	2216
		1628	457.1	31		162.1		86		
		1954	548.5	26		168.2		81		
477	926	257.1	36	990	137.3	160	66	4.2	2214	
	1543	428.5	28		141.1		84			
	1851	514.2	23		146.6		79			
440	854	237.1	31	990	111.1	132	64	3.9	2212	
	1423	395.2	24		113.4		82			
	1707	474.2	20		118.0		77			
JYSN500-M19	452	1212	336.7	26	990	116.5	185	73	5.0	1728
		2020	561.1	23		143.8		88		
		2424	673.3	19		139.5		88		
	434	1164	323.2	24	990	106.0	160	71	4.8	1726
		1939	538.7	20		125.8		86		
		2327	646.4	17		126.2		86		
407	1091	303.0	21	990	89.8	132	69	4.6	1724	
	1818	505.0	18		106.1		84			
	2182	606.0	15		106.5		84			
371	994	276.1	17	990	70.0	110	67	4.4	1722	
	1656	460.1	15		82.2		82			
	1988	552.1	13		82.5		82			
JYSN500-N19	452	1028	285.7	25	990	106.3	160	66	4.5	1726
		1714	476.1	22		118.1		88		
		2057	571.3	18		117.1		87		
	420	956	265.7	22	990	88.2	132	64	4.3	1724
		1594	442.8	19		97.2		86		
		1913	531.3	16		96.4		85		
389	884	245.7	18	990	72.0	110	62	4.0	1722	
	1474	409.5	16		78.7		84			
	1769	491.4	13		78.1		83			
371	843	234.3	17	990	64.5	90	60	3.9	1720	
	1406	390.4	15		69.9		82			
	1687	468.5	12		69.4		81			
JYSN500-M28	390	1212	336.7	17	990	70.1	110	80	5.0	1265
		2020	561.1	14		89.6		86		
		2424	673.3	10		76.2		84		
	371	1151	319.8	15	990	59.4	90	78	4.8	1264
		1919	533.1	12		73.7		84		
		2303	639.7	9		66.9		82		
347	1079	299.6	13	990	50.1	75	76	4.6	1263	
	1798	499.4	10		62.1		82			
	2157	599.3	8		56.4		80			
332	1030	286.2	12	990	44.8	75	74	4.5	1262	
	1717	476.9	9		55.5		80			
	2060	572.3	7		50.4		78			
JYSN500-N28	390	1028	285.7	16	990	64.0	90	72	4.5	1264
		1714	476.1	14		74.4		85		
		2057	571.3	10		64.0		83		
	374	987	277.1	15	990	58.2	75	70	4.4	1263
		1645	461.8	12		67.4		83		
		1975	554.2	9		58.0		81		
351	926	260.0	13	990	49.4	75	68	4.2	1262	
	1543	433.3	8		56.9		81			
	1851	519.9	8		49.0		79			
332	874	242.8	12	990	42.9	55	66	4.0	1261	
	1457	404.7	10		49.2		79			
	1748	485.6	7		42.4		77			
JYSN600-M9	782	1902	528.3	85	990	578.4	900	76	6.7	4160
		3170	880.6	76		751.9		87		
		3804	1056.7	66		829.7		82		
	751	1826	507.2	78	990	525.6	800	74	6.5	4158
		3043	845.3	70		680.9		85		
		3652	1014.4	61		752.4		80		
712	1731	480.8	70	990	460.1	710	72	6.3	4156	
	2885	801.3	63		593.9		83			
	3462	961.6	54		657.3		78			
657	1598	443.8	60	990	372.2	560	70	6.0	4154	
	2663	739.7	53		478.7		81			
	3195	887.6	46		530.6		76			
JYSN600-N9	782	1614	448.3	82	990	527.8	710	68	6.0	4158
		2690	747.2	73		617.5		87		
		3228	896.6	64		696.9		81		
	766	1582	432.6	71	990	459.5	630	66	5.9	4157
		2636	721.0	63		534.1		85		
		3163	865.2	55		596.3		79		
	719	1485	414.7	65	990	408.6	560	64	5.7	4154
		2475	691.1	58		471.8		83		
		2970	829.4	50		527.7		77		
	680	1404	398.5	60	990	368.4	500	62	5.6	4152
		2340	664.2	54		422.3		81		
		2808	797.1	47		473.2		75		
657	1356	376.6	54	990	328.1	450	60	5.4	4150	
	2259	627.6	48		373.3		79			
	2711	753.2	42		419.1		73			
JYSN600-M13	631	1902	528.3	59	990	389.1	560	78	6.7	3856
		3170	880.6	48		465.6		89		
		3804	1056.7	38		486.0		81		
	618	1864	517.8	56	990	375.9	500	76	6.6	3855
		3107	862.9	46		443.5		87		
		3728	1035.5	36		461.4		79		
593	1788	496.6	52	990	340.7	450	74	6.5	3853	
	2980	827.7	42		400.6		85			
	3576	993.3	33		417.7		77			
568	1712	475.5	47	990	307.3	400	72	6.3	3851	
	2853	792.5	38		360.1		83			
	3424	951.0	30		376.4		75			
540	1626	451.7	43	990	271.0	355	70	6.1	3849	
	2710	752.9	35		316.3		81			
	3252	903.5	27		331.6		73			
JYSN600-N13	631	1614	448.3	57	990	355.1	450	70	6.0	3855
		2690	747.2	46		382.4		89		
		3228	896.6	37		408.2		80		
	606	1549	434.9	52	990	323.4	400	68	5.9	3854
		2582	724.8	43		346.1		87		
		3099	896.7	34		370.4		78		
574	1469	412.4	47	990	283.8	355	66	5.7	3851	
	2448	687.4	38		301.7		85			
	2937	824.9	31		323.8		76			
540	1380	383.3	41	990	242.7	315	64	5.4	3848	
	2300	638.8	34		256.3		83			
	2760	766.6	27		275.8		74			
JYSN600-M19	540	1902	528.3	37	990	289.0	355	67	6.7	2555
		3170	880.6	32		313.6		89		
		3804	1056.7	25		344.3		76		
	529	1864	517.8	36	990	276.1	355	66	6.6	2554
		3107	862.9	31		298.5		88		
		3728	1035.5	24		328.4		75		
508	1788	496.6	33	990	247.4	315	65	6.5	2552	
	2980	827.7	29		266.5		87			
	3576	993.3	22		293.7		74			
470	1655	459.7	28	990	199.2	250	64	6.1	2550	
	2758	766.1	24		213.7		86			
	3									



**WUXI XINJIUYANG MACHINERY MANUFACTURING CO., LTD**  
**XINJIUYANG PUMP**

Add: No.11 Xinghuo Road, Qianzhou Industrial Park, Huishan District, Wuxi City, Jiangsu Province, China

Wechat/Whatsapp: +86 17361952993

E-mail: [jasonyu@jyby.com](mailto:jasonyu@jyby.com)

Tel: +86 510-82626616 82621886 83582816

Fax: +86 510-83582886

PC: 214181

[Http//www.jyby.com](http://www.jyby.com)